
Compact Mixing Circuit





TECHNICAL DATA SHEET		
Product Name	Compact Mixing Circuit	
Standard	TSE K 534 / TSEK	
Max. Working Temperature	120°C (Excluding Circulation Pump)	
Pressure Class	PN10	
Intended Use	Underfloor Heating Systems	
Operating Temperature Range (Thermostatic Valve)	30-70°C	
Code	20.01.001-20-FN	



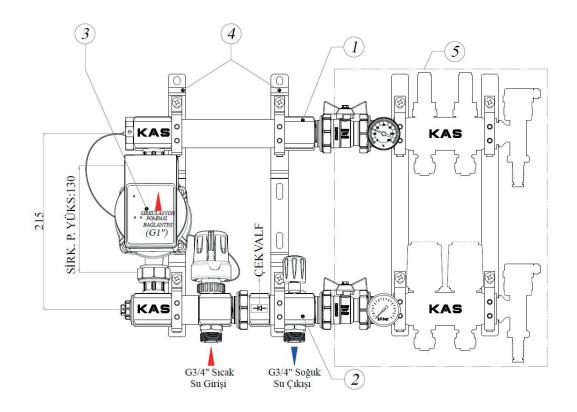



PART NO	PART NAME	QUANTITY
1	Stainless Steel Manifold Set With Flow Meter	1
2	Clamp	2
3	Circulation Pump (Optional)	1
4	Compact Mixing Subcircuit	1
5	Compact Mixing Upper Circuit	1

INSTALLATION and USAGE INSTRUCTION

- 1- Do not unpack the compact mixing circuit until installation to prevent falling of any unwanted substance that may affect the working of compact mixing circuit
- 2- Take measures against any possible damage that may occur during transport and shipment
- **3-** Clean away every unwanted substance in your system before installation
- 4- Compact mixing circuit should be off position while installing.
- **5-** Be careful that the thread length of the part that will be installed to the compact mixing circuit will not be too longer or too shorter than the thread length of the compact mixing circuit
- **6-** While installing, grab the compact mixing circuit by the appropriate tool from the across flats where you'll install it
- 7- During installation do not use excessive adhesive or any unsuitable substance
- **8-** Do not paint the compact mixing circuit. Do not expose the compact mixing circuit with abbrasive chemicals.
- 9- Do not use any others tools for opening or closing the compact mixing circuit and do not remove the handle
- 10- In case of any damage or disorder, compact mixing circuit should be changed bye authorities.
- **11** Complying with the installation and usage instruction is compulsory. Otherwise, the product will be out of quarantee.
- 12- Do not forger to get the document of guarantee. This document is valid only with the related bill.