


# UNDERFLOOR HEATING INSULATION PANEL

# KAS®

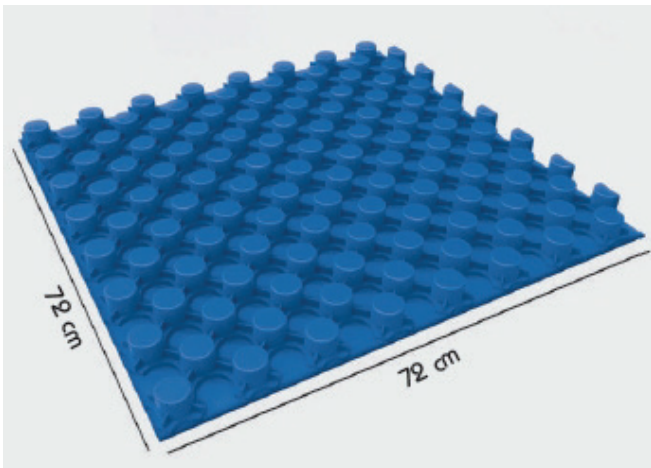

## TECHNICAL DATA SHEET

<b>Product Name</b>	Underfloor Heating Insulation Panel
<b>Dimensions</b>	72cm X 72cm
<b>Rohmaterial (TS EN 13163)</b>	Polystyrene Hard Styrofoam
<b>Pipe Dimensions Suitable for Cork</b>	16x2 & 20x2
<b>Intensity</b>	30kg/m <sup>3</sup>
<b>Foiled / Non-foiled</b>	Foiled
<b>Heat Conduction Coefficient (TS EN 12667 12939)</b>	%10 °C <0,036 W/mK
<b>Thermal Conductivity Resistance (TS EN 12667 12939)</b>	0,60m <sup>2</sup> +**
<b>Modulation Stages</b>	5 cm and its multiples
<b>Intended Use</b>	Preventing heat transfer to the floor by providing thermal insulation in underfloor heating systems and fixing underfloor heating pipes to the ground

