

1" Drain Cock For Manifold with Automatic Air Vent

KAS®




TECHNICAL DATA SHEET

Product Name	1" Drain Cock For Manifold with Automatic Air Vention
Operating Temperature	Max. 110°C
Operating Pressure	Max. 10 bar
Intended Use	Water Installation

MATERIALS

Body	Brass (CW617N)/CW614N)
Nut	Brass (CW617N)/CW614N)
Socket	Brass (CW617N)/CW614N)
Automatic Air Vent	Brass (CW617N)/CW614N)
Seals	NBR / EPDM

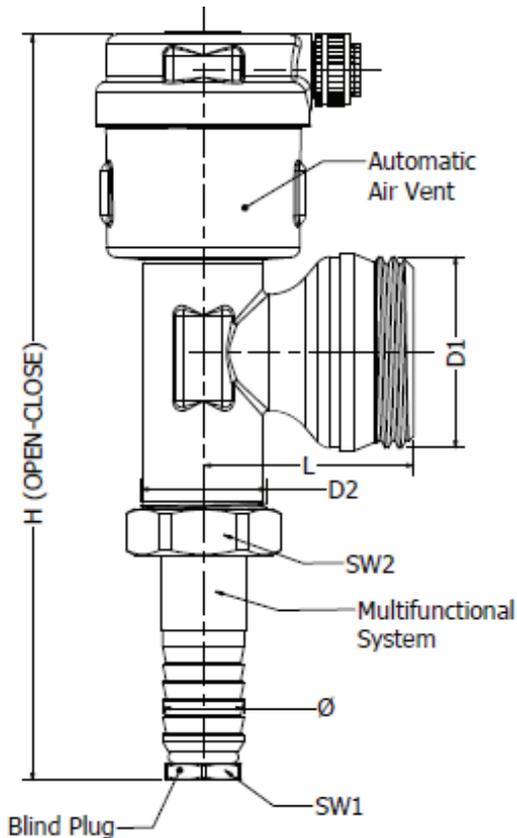


DIMENSIONS

Product Code	18.09.351
D1	1"
D2	M22 x 1,5
L	36
H (Open)	121
H (Close)	130
SW1	12
SW2	24
Ø	13,9

Dimensions are in "milimeter"

1" Drain Cock For Manifold with Automatic Air Vent

KAS®

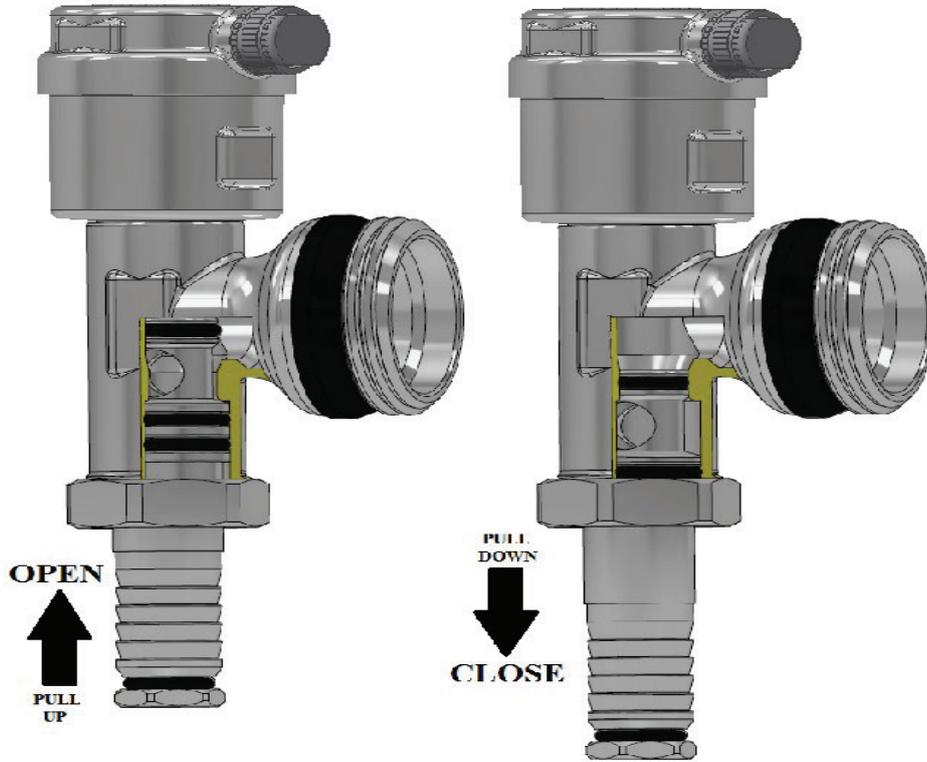

INSTALLATION and USAGE INSTRUCTION

- 1- Do not unpack the drain cock until installation to prevent falling of any unwanted substance that may affect the working of drain cock.
- 2- Take measures against any possible damage that may occur during transport and shipment.
- 3- Clean away every unwanted substance in your system before installation.
- 4- While installing, grab the drain cock by the appropriate tool from the across flats where you'll install it.
- 5- During installation do not use any unsuitable substance.
- 6- Do not paint the drain cock. Do not expose the drain cock with abrasive chemicals.
- 7- In case of any damage or disorder , drain cock should be changed by authorities.
- 8- Complying with the installation and usage instruction is compulsory. Otherwise, the product will be out of guarantee.
- 9- Do not forget to get the document of guarantee. This document is valid only with the related bill.