


## **COMPACT MIXING CIRCUIT - TYPE 2**





TECHNICAL DATA SHEET - 20.01.002		
Product Name	Compact Mixing Circuit Type 2	
Standard	TSE K 534 / TSEK	
Max. Operating Temperature	120°C(Except circulation pump)	
Pressure Class	PN 10	
Usage Area	Underfloor heating systems	
Operating Temperature Range	30-70°C	
Code	20.01.002	

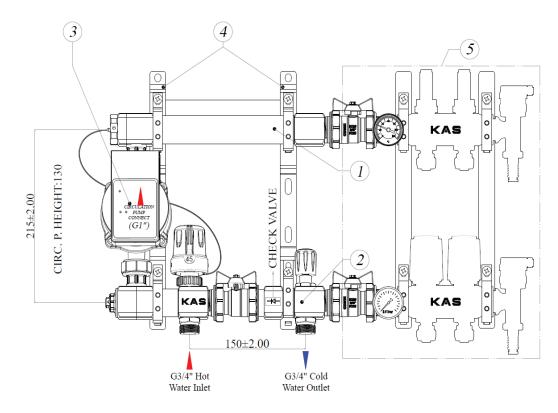

PART NO	MATERIAL TYPE	MATERIAL SERIES
5	Stainless Flowmeter - Thermostatic Collector Set	1
4	Handcuff	2
3	Circulation Pump (Optional)	1
2	Compact Mixture Sub-Circuit	1
1	Compact Mixture Upper Circuit	1

## www. kas.com.tr



## **COMPACT MIXING CIRCUIT - TYPE 2**



## **INSTALLATION AND USAGE INSTRUCTIONS**

1-Before assembly, do not remove it from the package until the moment of assembly to prevent foreign matter from entering the Compact mixing circuit that may affect its operation.

2-Take precautions against any damage that may occur during transportation and shipment.

3- Clean any foreign matter in your installation before installation.

4-The compact mixing circuit must be in the closed position during installation.

5- Make sure that the thread length to be connected to the collector is not too short or too long than the thread length on the collector.

6-First, mount the hose to the collector. Grasp the collector assembly from the wrench opening and assemble it with a suitable wrench that will not damage it.

7-Do not use excessive glue or any other unsuitable substance during installation.

8- Do not paint the compact mixing circuit or contact it with corrosive chemicals.

9-Do not use any other tool and do not remove the handle to open or close the compact mixing circuit.

10-The compact mixing circuit must be replaced by the authorities in case of any damage or malfunction.

11- It is mandatory to comply with the installation and usage instructions. Otherwise, the product will be out of warranty. 12-Do not forget to get the warranty certificate. This document is only valid together with the corresponding invoice.