


2 WAY VALVE

KAS®

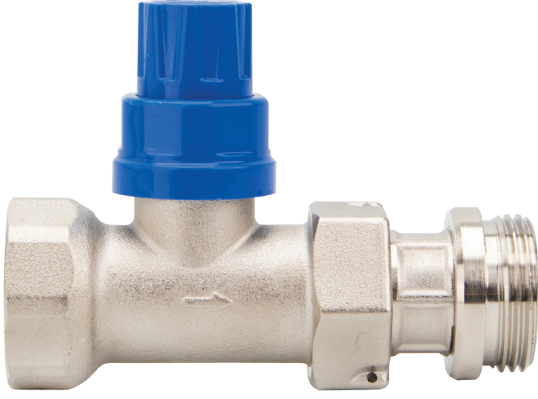

TECHNICAL DATA SHEET

Product Name	2 Way Valve
Diameter	DN 25
Pressure Class	PN16
Operating Temperature	0...110° C
Kvs	2,34 m ³ /h
Differential Pressure	$\Delta P_{max} = 100kPa$
Pin Stroke	3mm
Using with Thermostatic Head	Suitable
Valve Body Material	Brass
Gasket Material	NBR/EPDM
Pole ORing Material	EPDM-Oring
Pole Oring Material	Stainless Steel
Packing Material	Brass
Intended Use	Performing the on-off functions of all collectors from a single point with actuator control in the underfloor heating system.

