
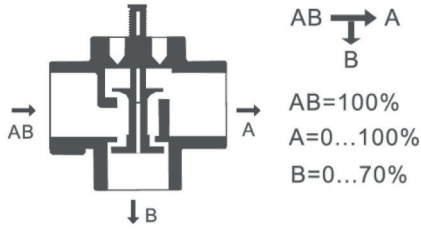


3 WAY VALVE

KAS®



TECHNICAL DATA SHEET

| | |
|-----------------------------------|--|
| Product Name | 3 Way Valve |
| Dimension | DN 25 |
| Pressure Class | PN16 |
| Operating Temperature | 0...110 °C |
| Kvs | A → AB 5m ³ /h, B → AB 3,5m ³ /h |
| Differential Pressure | ΔP _{max} = 100kPa |
| Pin Stroke | 2,7mm |
| Use with Thermostatic Head | Suitable |
| Valve Body Material | Brass |
| Pole Oring Material | EPDM-ORing |
| Spindle-Spring Material | Stainless Steel |
| Packing Material | Brass |
| Intended Use | It is used as a mixing valve in the underfloor heating system. |

